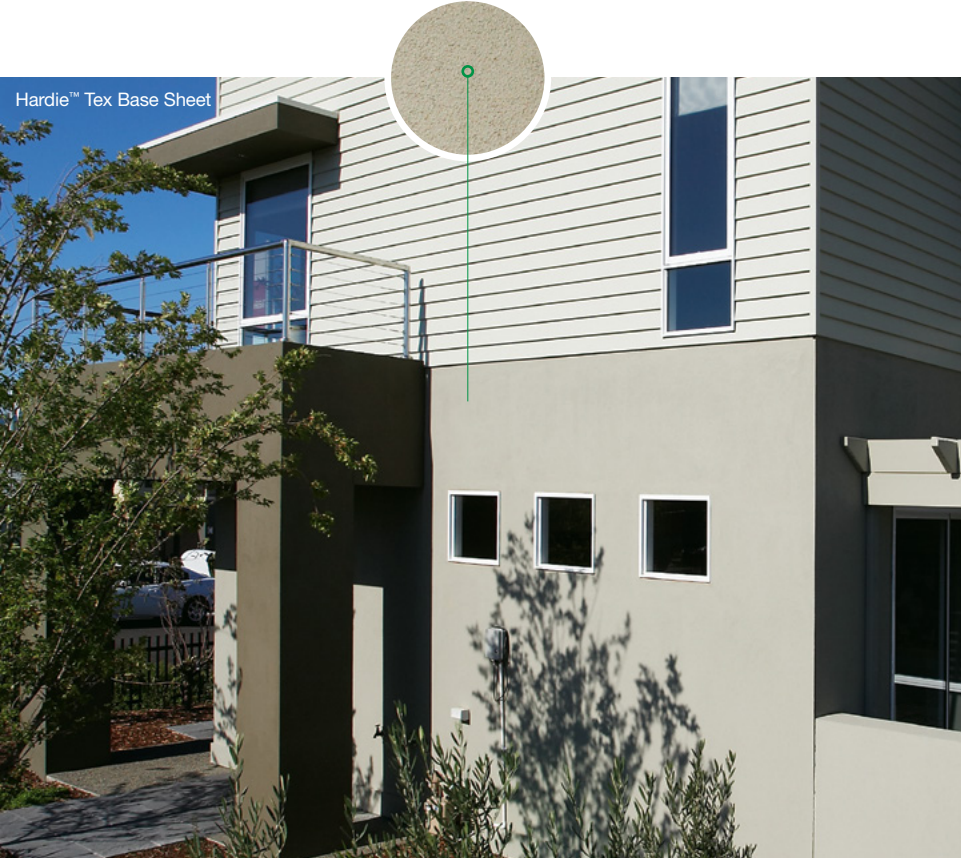


Hardie™ Tex Base Sheet

Hardie™ Tex Base Sheet is a strong, pre-primed base sheet that is finished on-site with a specialised texture coat system*. Hardie™ Tex Base Sheet is the original way to create a decorative, monolithic rendered look without the need for masonry. Hardie™ Tex Base Sheet is suitable for use as an external cladding

in residential homes, including renovations and extensions, where a lightweight system with a monolithic rendered look is required. For an even easier solution choose Hardie™ Fine Texture Cladding, an 8.5mm thick panel featuring a v-groove joint, which has the render texture already in the panel.





Product Code	Length (mm)	Width (mm)	Thickness (mm)	Weight per Unit* (kg)	Coverage per Panel (m²)
401651	2,440	1,200	7.5	33.9	2.93
400294	2,725	1,200	7.5	38.2	3.27
400291	3,000	1,200	7.5	41.7	3.6

Selling units per pack: 30 sheets



25 year warranty

Hardie™ Tex Base Sheet Accessories

	Hardie™ 7.5mm PVC Starter Strip 3,000mm A perforated PVC extrusion, used with Primeline™ Newport Weatherboard to kick out the bottom row to the correct angle. Length: 3,000mm Selling Unit: 25 per pack		Hardie™ Tex 7.5mm PVC Z Flashing A PVC extrusion for use with Hardie™ Tex System to provide an alternative detail option at horizontal control joints. Length: 3,000mm Selling Unit: 25 per pack
	Hardie™ Drive Screw 41mm Square Drive A class 3 self-tapping wing-tipped screw for fastening to 0.5mm to 1.6mm BMT light gauge steel frames. Selling Unit: 1,000 per box		Hardie™ Drive Screw 41mm Phillips Drive Collated A class 3 self-tapping wing-tipped screw for fastening to 0.5mm to 1.6mm BMT light gauge steel frames. Suitable for use in most auto feed screw guns. Selling Unit: 1,000 per box
	Hardie™ Fibreshears Electric tool for cutting fibre cement sheets. Selling Unit: 1 each		Villaboard™ Knife A score and snap knife designed to efficiently cut through Hardie™ external cladding and internal lining products ≤9mm thick. Selling Unit: 12 per pack
	Hardie™ Blade 185mm A poly-diamond blade for fast and clean cutting of Hardie™ fibre cement products. Diameter: 185mm Selling Unit: 1 each		Hardie™ Blade 254mm A poly-diamond blade for fast and clean cutting of Hardie™ fibre cement products. Diameter: 254mm Selling Unit: 1 each
	Hardie™ Joint Sealant* 300mL cartridge A general purpose, paintable, exterior grade polyurethane joint sealant. 300mL cartridge Selling Unit: 20 per box		Hardie™ Joint Sealant* 600mL sausage A general purpose, paintable, exterior grade polyurethane joint sealant. 600mL sausage Selling Unit: 20 per box

Notes:

All dimensions and masses provided are approximate only and subject to manufacturing tolerances.
Products are to be installed in accordance with the relevant and current Product Installation Guide and Technical Documentation.
For information relating to installation, best practices, warnings and warranties visit www.jameshardie.com.au or phone us on 13 11 03.

Key:

^ Hardie™ Joint Sealant is unsuitable as a fire rated sealant. ° Piece weight covers the physical product weight per board/sheet.